

# Mini3S Standard Package

www.FiberFox.co.kr



- 1 MINI 3S Splicer
- 2 Cleaver Softcase
- 3 MINI 50GB Cleaver
- 4 Power Cord
- 5 Data Cable
- 6 AC Adapter
- 7 Cooling Tray
- 8 Spare Electrode
- 9 Hand Carrying Case
- 10 Shoulder Strap
- 11 Battery Pack
- 12 USB Cable

## Specifications

Splicing	Method	Active Alignment (DAA: Digitalized Active Alignment)	
	Loss	SM(0.03dB) / MM(0.02dB) / DS(0.05dB) / NZDS(0.05dB)	
	Time	RL : >>60dB <b>SM Mode : 8 Sec.</b>	
	Mode	139 modes (Pre-set: 11 / User set-up: 128)	
Applicable Fiber (Cable)	Attenuation	Available rage : 0.1 ~ 20dB	
	Fiber Type	SM (ITU-T G.652 & G.657) MM (ITU-T G.651) DS (ITU-T G.653) NZDS (ITU-T G.655)	
	Coating Diameter	100-3,000um	
	Cladding Diameter	80-150um	
Heating	Cleaved Length	<250Um Coating : 5-16mm >250Um Coating : 8-16mm	
	Time	<b>Ave. 18 Sec.</b>	
Hardware	Mode	37 modes (Pre-set: 5 / User set-up: 32)	
	Applicable Sleeve	20 ~ 60mm	
	Connectivity (link to PC)	USB(5Pin Mini-B)	
	Electrode Life span	> 3,500 arcs	
	Data Storage	Splice record : 10,000 / Image : 2,000	
	Fiber detecting	Dual CCD camera with LED emitting system	
	Illumination	LED Spot light	
	Display	Color 4.3" LCD monitor, with Touch Screen (Tempered Glass)	
	Battery		Li-ion 11.1V 3000mAh
			<b>200 cycles (Splicing &amp; Heating)</b> Storage Temperature : -20~40°C
	Power Supply	AC 100-240V input or DC 12.6V 1.8A	
	Fiber Display (Magnification)		X/Y (Single image): 260x
			X&Y (Dual image): 130x
Weight	1.1kg (with battery : 1.3kg)		
Size	123 x 114 x 126mm (L x W x H)		
Reliability	Wind Protection	Wind speed: 15m/s (max)	
	Operating Environment	Altitude: 0-5,000m Temperature: -10-50°C Humidity: 0-95%RH	
	Storage Condition	Temperature: -20 to 60°C Humidity: 0-95%RH	
	Pull Test	1.96~2.25N(standard)	



## Active Alignment Splicer

1.1 kg

200 cycles

8 sec

0.03 dB

# Characteristic



Heating Time  
18 sec



LED Injection



# Mini 3S

1.1kg

(with Battery 1.3kg)

123 x 114 x 126 mm



3000mAh Battery is Included  
- 200 cycles (splicing & heating)



Splice Time : 8 sec  
Electrode Lifespan : 3,500 arcs




Full Touch Screen  
- GUI Interface  
- Tempered Glass

# 01

## Performance

Guaranteed Stability and Splicing Performance

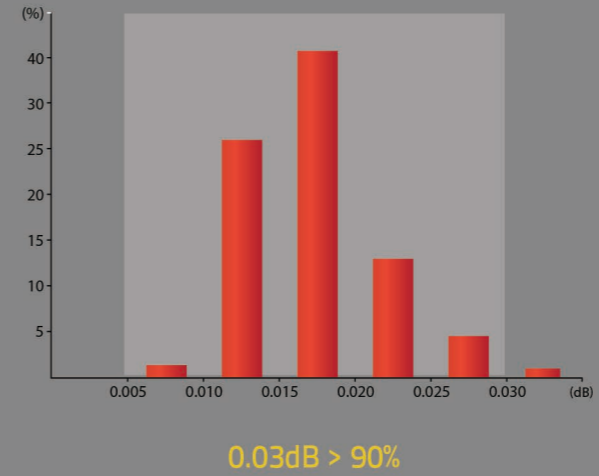

# 02

Splicing Time  
8 sec

# 03


Durability



Waterproof



Dustproof



Anti-shock

# 04

Reliability

Perfect performance  
under any environmental conditions



Temperature  
-15~60



Relative humidity  
0~95%



Elevation  
0~5000meter



The max wind  
speed 15m/s

Compliant with IEC Standard